

The AW-D135C Conventional manual call point is designed to be use with Asenware conventional AW-CFP2166 series panels. If it is pressed after a fire is confirmed, an alarm signal may be sent to a fire alarm control system which will, after receiving the alarm signal, enter fire alarm condition.


When the manual fire call points is operating normally, the red indicator will blink; when there is a fire alarm, it will remain lit.



Features

- ✓ Surface mounting
- ✓ LED warning indicator
- ✓ Excellent reliability and high stability
- ✓ Comply with EN54-11

Installation

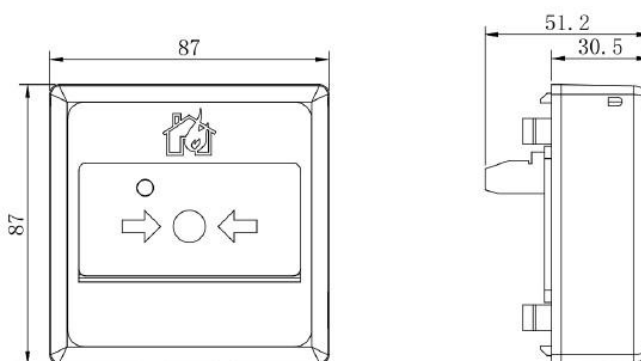

Technical Specification

Model	AW-D135C
Main Voltage	16-24VDC
Operating Current	Monitoring status $\leq 20\mu\text{A}$; Alarm status $\leq 15\text{mA}$
Application	For indoor use
Environmental	Temperature range: -10 to 55°C ($14\sim 131^{\circ}\text{F}$) Humidity: $\leq 95\%$ RH, non-condensing
Materials and colors	ABS, Red
Size	87mm* 87mm* 51.2mm
Weight	About 95g