

**BAVARIA**

Fire Fighting Solutions

When It Comes To Your Safety Only The Best Is Good Enough

**BAVARIA**

## **BAVARIA®** Wall Mounting Fire Hose Reel With Reinforced Sime Rigid Two ply PVC Hose

# BAVARIA SHR-2ply



The BAVARIA Hose reel using high quality steel 100% electrostatic pure polyester red coating. Bavaria wall mounting hose reel is suitable for use in both areas outdoors & indoors, as in offices, schools, sports areas, cinemas, assembly rooms, hotels, resorts, malls, airports, hospitals industrial and commercial fire protection needs , such as manufacturing, warehouse, apartment buildings, restaurants, malls, and more ...

**BAVARIA****BAVARIA** EGYPT (S.A.E.)

Gisir El Suez St. Block 109, Industrial Zone,  
Ismailia Desert Road, Cairo-Egypt  
PO Box: 2016/11111 Cairo-Egypt

**BAVARIA****BAVARIA** Brandschutz Industrie GmbH & Co. KG

Regensburger Str. 16,  
93449 Waldmünchen  
Germany


Tel. : +20 (0) 2 2182 0604 / 5 / 6  
Fax : +20 (0) 2 2182 0609  
Website : [www.bavaria-firefighting.com](http://www.bavaria-firefighting.com)  
Email : [international.sales@bavaria.com.eg](mailto:international.sales@bavaria.com.eg)

Tel. : + 49 (9972) 9401-0  
Fax : + 49 (9972) 9401-17  
Website : [www.bavaria-firefightig.com.eg](http://www.bavaria-firefightig.com.eg)  
Email : [info@bavaria-brandschutz.de](mailto:info@bavaria-brandschutz.de)

## BAVARIA® Wall Mounting Fire Hose Reel With Reinforced Sime Rigid Two ply PVC Hose

### Technical Specifications

The figures show the movement of the hose reel with the arm allows the reel to swing completely outside of the cabinet allowing smooth hose retrieval in left and right directions without hose twisting

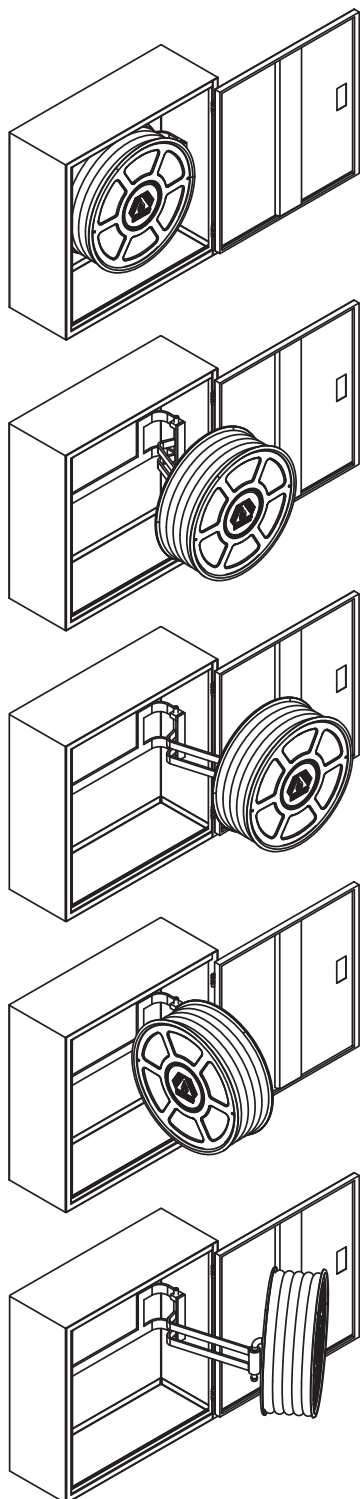

### Types of Hosereels:

- BAVARIA fire cabinets and 1 inch hose reel acquired the quality mark certificate according to ES7716-1 (EN671-1).
- Hose reel equipped with 1 inch (25 mm) diameter two ply PVC hose, manufactured according to EN694.

### Technical Specifications:

| Hosereel Types           | SHR-1ply                                     |
|--------------------------|----------------------------------------------|
| Hose Reel Diameter       | *580 mm                                      |
| Hose Reel Swinging Range | 0° - 180°                                    |
| Hose Reel Material       | Steel according to DIN EN 10130              |
| Hose Reel Paint Finish   | Surface treatment and 100% polyester coating |
| Water Way Elbow          | Brass                                        |

\*650 mm for fire both cabinets type Admiral and square polymer



Fire Fighting Solutions

When It Comes To Your Safety Only The Best Is Good Enough

**BAVARIA**

## BAVARIA® Wall Mounting Fire Hose Reel With Reinforced Sime Rigid Two ply PVC Hose



Two Layers textile wrapped

### Technical Specifications

#### Hose reel equipped with 1 inch (25 mm) diameter two ply PVC hose.

|                            |                                |
|----------------------------|--------------------------------|
| Hose diameter and length   | 25mm (1inch) x 30m             |
| Wall thickness             | 4.3 mm                         |
| Layers textile wrapped     | 2 layer                        |
| Type                       | Reinforced Sime Rigid PVC hose |
| Max working pressure range | 12 bar                         |
| Hose bursting pressure     | Over 55 bar                    |
| According to               | EN694                          |



#### Landing Valves (fire valves) with 30° Outlet - For hose diameter 25 mm (1inch)

|             |                                                                                    |
|-------------|------------------------------------------------------------------------------------|
| Type        | BAVARIA                                                                            |
| Outlet male | Brass Nipple- for hose diameter 25 mm (1 inch)<br>crimped with a ( collar) ferrule |



#### BAVARIA Multipurpose water nozzle - For hose diameter 25 mm (1 inch)

|                       |                                                                                                                          |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------|
| Type                  | BAVARIA                                                                                                                  |
| Country of Origin     | German made                                                                                                              |
| Material              | Made of Copper alloy, and has external polymer cover, as well as it has a rubber ring in the front for impact protection |
| Operation Mode        | Multipurpose (jet and spray) nozzle                                                                                      |
| Flow Rate             | up to 72 l/min at 6 bar                                                                                                  |
| Max. working Pressure | 16 bar                                                                                                                   |
| Max. Throw Range      | Throw distance 21 m at 6 bar, at full jet                                                                                |
| Hose Tail             | 1 inch                                                                                                                   |



### Warranty:

|                             |                                                                                                                                        |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Period of Warranty          | 1 Year                                                                                                                                 |
| Coverage of the Warranty    | Against material failure and production defects                                                                                        |
| Method of Warranty Coverage | Limited to the replacement of the defected part or product after verification that the failure is covered by the scope of the warranty |
| Warranty Exclusions         | Failures due to misuse, mishandling, or inspection or repair by an unauthorized dealer or entity                                       |

\* The illustrations may show optional extras only available at extra charge. BAVARIA retains the right to alter specifications and illustrations given herein without prior notice. Specifications will only be considered communicated at placing of order.

3/3